

iFace 402

Multi-biometric Identification Time Attendance and Access Control Terminal



iFace402 multi-biometric identification time attendance and access control terminal adopts BioKey's latest platform with Face algorithm and large capacity memory. With the upgraded hardware, it can now store up to 1200 face templates.

It Integrated with 800MHz high speed Multi-Bio processor and high definition infrared camera enables user identification in the dark environment. Face and fingerprint multi-biometric identification methods make it more applicable. Multi-model communications consisting of RS232/485, TCP/IP and Wi-Fi/GPRS (optional) allow an extremely easy data management. Optional built-in 2000 mAh battery eliminates the trouble of power failure.


Feature

- Identification methods include Face, Fingerprint/RFID and/or Password
- Elegant ergonomic design
- 4.3" TFT touch screen is user-friendly and very intuitive
- 6 user-defined function keys
- Contact relays for door access control (wires to door strike or 3rd party panel)
- Web server management software via IE browser.
- Optional extendable scheduled-bell
- Infra-red optical system enables user-identification in poorly lit environments
- Optional built-in battery backup provides approx 4 hours continuous operation
- Optional built-in wireless Wi-Fi or GPRS for wireless communication
- Built-in contacts for 3rd party electric lock, door sensor, alarm, exit button, or bell
- Wiegand Output for connections to 3rd party access control panels


Specifications

Display	4.3" TFT touch screen Face 1200 (1:N)
Face capacity	1200 (1:N)
Fingerprint capacity	2000
ID Card capacity	10,000
Logs capacity	100,000
Algorithm Version	Face 7.0 & Finger 10.0
2000mAh backup battery	Optional
Communication	TCP/IP, RS232/485
USB-HOST	Two USB-Host
Wireless Wi-Fi	Optional
Time attendance Standard functions	ID Card(Optional), Automatic Status Switch, Self-Service Query, Work Code, T9 input, 9 digit user ID, DLST
Access control interfaces for	3rd party electric lock, door sensor, exit button
Wiegand Signal	Output
Optional functions	Serial printer, Mifare card, Extendable Scheduled-bell, Short Massage, Web-server, GPRS
Power supply	12VDC 3A
Verification Speed	≤2 sec
Operating temp	0 °C- 45 °C
Operating Humidity	20%-80%
Dimension(WxHxD)	193.6x165x111 mm
Gross Weight	1.75 kg

Configuration

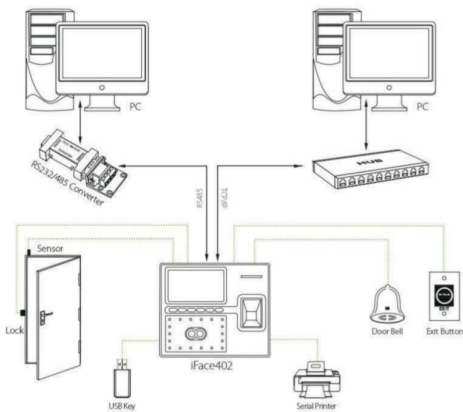

What's in the Box

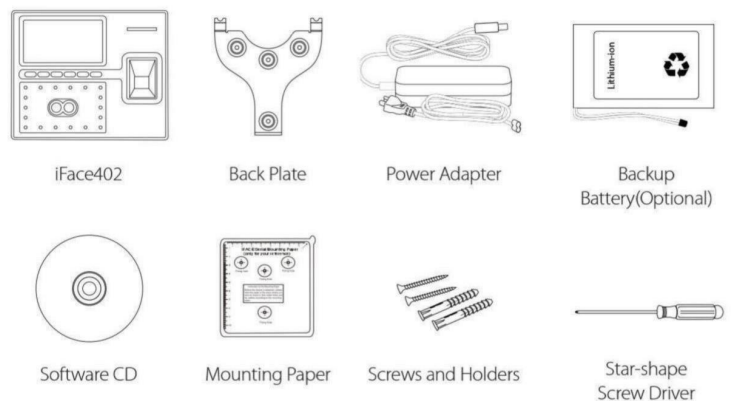

Kingdom of Saudi Arabia Riyadh Olaya Street
 Telefax : +966 0114164010
 Mobile : +966 500259990 +966 507776675
 Email : Sales@tawatur-it.com

CONTACT
www.tawatur-it.com

