



# US922

Portable Fingerprint Time and Attendance reader

Waterproof, Dustproof and Shockproof Portable Fingerprint Time Attendance reader.



### Biometric Performance:

Reliable, durable and highly accurate fingerprint sensor with latest algorithm provides less than 1.5 second user recognition.



### Communication:

S922 installs easily on your network and supports both hard-wired TCP/IP and optional wireless connections like Wi-fi and GPRS.



### Easy Operation and Management:

Works without computer. Complete setup and programming can be done via keypads and embedded firmware. Graphical User interface on a 3.5 inch TFT display for rich user experience. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints.



### Capacity:

Supports up to 5,000 fingerprint templates, expandable to 10,000 templates, 30,000 cards/badges. All models support up to 200,000 transactions.



### Rugged Enclosure:

The reader is protected with a rubberized sleeve so that it can withstand shocks and rough and tough use. It also has a flexible handle so that it is easy to carry from place to place



### Large Capacity Battery:

S922 comes standard with 7600 mAh battery which has 16 hours of operation time and 28 hours of standby time.



### Options:


S900 Series readers can be configured with optional internal Wi-Fi module, GPRS/GSM cell module and either HID Prox, HID iClass and 13.56 MHz Mifare cards.



### For Software Developers:

Free SDK and development tools are available for developers/partners who wish to integrate S922 with any application which requires verifying people. Custom development is also available for OEM partners upon request.

## Configuration

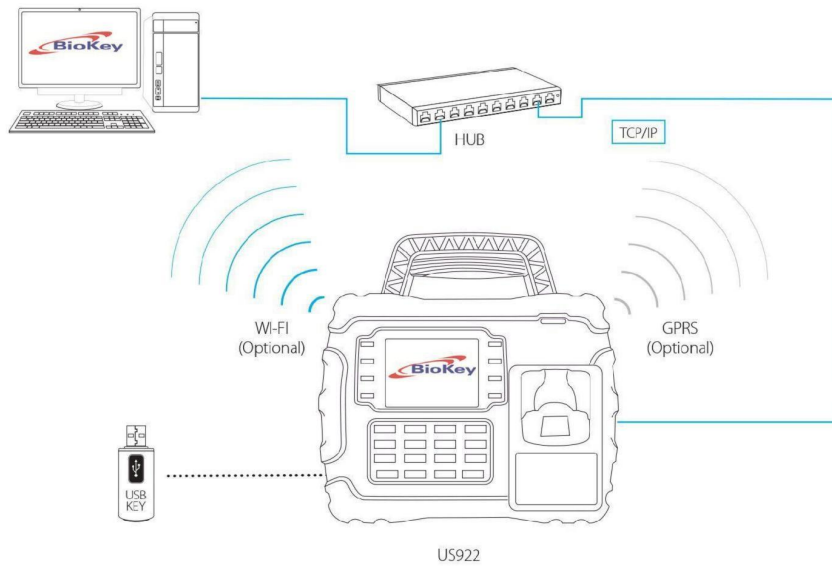

## Specifications

### Capacity

**Fingerprint:** 5,000, Optional:10,000

**Transactions:** 200,000

### Display

3.5 in. TFT Color Display

### Standard Functions

Workcode, SMS  
Self-service query  
Scheduled bell

### Communication

Ethernet, USB-Host *Optional:* Wi-Fi & GPRS

### Power

12V DC, 3A

Built-in Backup 7600 mAh Battery

### Environment

**Operating Temperature:**

32° F to 113° F ( 0° C to 45° C)

**Operating Humidity:**

20% to 80%

### Supported Options

HID, MiFare, GPRS, 3G

### Dimensions

**Width:** 8.75 in. (22.5 cm)

**Height:** 8.75 in. (22.5 cm)

**Depth:** 4.3 in. (11 cm)

**Weight:** 3 lbs. (1.36 kg)

## Part Numbers

**S922 HID** with HID card reader

**S922-GPRS** with cellular connectivity


**S922-WIFI** with Wi-Fi connectivity

**S922-M** with Mifare card reader


## What's in the Box



US922



AC Power Adapter



Backup battery



Network Cable



ID card



Design and Specifications subject to change without notice

Kingdom of Saudi Arabia Riyadh Olaya Street  
Telefax : +966 0114164010  
Mobile : +966 500259990 +966 507776675  
Email : Sales@tawatur-it.com

**CONTACT**

www.tawatur-it.com