



# F18

Access Control  
Biometric Fingerprint Device



## Features

### Standard Features

- Reliable, durable & highly accurate optical
- Built-in Serial and Ethernet ports sensor
- Built-in Wiegand input/output ports
- Less than 1 second user recognition
- Stores 3000 templates and 30,000 transactions
- Built-in USB port allows for manual data transfer
- Reads Fingerprint and/or Pin's and/or RFID card

### Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Integrated 125kHz RFID proximity reader

### Software

- Access Control Management 3.5
- Time.net (T&A)

### Related Products



ZK4500



F12-Slave



RFID Cards



Exit Button



Maglocks




Mini UPS

## Specifications

- Fingerprint Capacity: 3,000 templates
- Transaction Capacity: 30,000 transactions
- RFID Card Capacity: 10,000 cards
- Sensor: Optical Sensor
- Algorithm Version: Finger v10.0
- Built-in Card Reader: 125kHz RFID proximity reader
- Communication: RS485, TCP/IP, USB-host
- Wiegand Ports: Input and Output any bits
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: 50 time zones, 5 access control groups, 10 combinations
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20%-80%
- Dimension: 80 X 183 X 42mm

## Dimensions

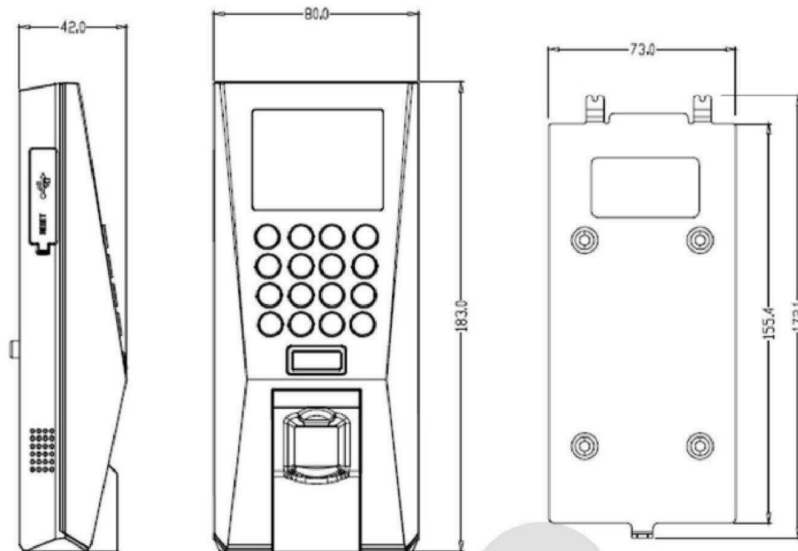

## Configuration



Kingdom of Saudi Arabia Riyadh Olaya Street  
 Telefax : +966 0114164010  
 Mobile : +966 500259990 +966 507776675  
 Email : Sales@tawatur-it.com

**CONTACT**  
[www.tawatur-it.com](http://www.tawatur-it.com)